

**产品特点:**

- 二段高速、低压、进油迅速，操作容易回油方便；
- 采用旋转式挤压方式迅速回油；
- 当压力到达700kg/cm<sup>2</sup>（12T时所设计安全保护装置，会有咔嚓声警告操作者，停止动作；
- 压接头部可以做180°的旋转；
- 一个人可用于高空作业省时省力。

**FEATURES:**

- The second stage is high-speed, low-pressure, fast oil intake, easy operation and convenient oil return;
- Use rotary extrusion method to quickly return oil.
- The safety protection device is designed when the pressure reaches 700kg/cm<sup>2</sup> (12T). There will be a clicking sound to warn the operator and stop the action;
- The crimping part can be rotated by 180°;
- One person can work at height, saving time and effort.

**CPO-150 液压点压钳**  
Hydraulic crimping tools**技术参数 TECHNICAL DATA:**

出力(Crimping force):	10T
压接范围(Crimping force):	铜鼻子8-150mm <sup>2</sup> , 铝鼻子14-150mm <sup>2</sup>
压接形式(Crimping type):	点压
行程(Stroke):	17mm
尺寸(Size):	570 x 130 x 250mm
重量(Weight):	6.7kg
包装(Package):	塑料箱
配件 ACCESSORIES:	
模具(Crimping dies):	公模: 8-38, 60-150mm <sup>2</sup> 母模: 14-22, 35-60, 70-80, 100-150mm <sup>2</sup>

**产品特点:**

- 二段高速、低压、进油迅速，操作容易回油方便；
- 采用旋转式挤压方式迅速回油；
- 当压力到达700kg/cm<sup>2</sup>（12T时所设计安全保护装置，会有咔嚓声警告操作者，停止动作；
- 压接头部可以做180°的旋转；
- 一个人可用于高空作业省时省力。

**FEATURES:**

- The second stage is high-speed, low-pressure, fast oil intake, easy operation and convenient oil return;
- Use rotary extrusion method to quickly return oil.
- The safety protection device is designed when the pressure reaches 700kg/cm<sup>2</sup> (12T). There will be a clicking sound to warn the operator and stop the action;
- The crimping part can be rotated by 180°;
- One person can work at height, saving time and effort.

**CPO-200 液压点压钳**  
Hydraulic crimping tools**技术参数 TECHNICAL DATA:**

出力(Crimping force):	12T
压接范围(Crimping force):	铜鼻子16-185mm <sup>2</sup> , 铝鼻子16-185mm <sup>2</sup>
压接形式(Crimping type):	点压
行程(Stroke):	26mm
尺寸(Size):	570 x 130 x 250mm
重量(Weight):	7.5kg
包装(Package):	塑料箱
配件 ACCESSORIES:	
模具(Crimping dies):	公模: 16-25, 35-70, 70-185mm <sup>2</sup> 母模: 16-35, 50-70, 95-120, 150-185, 240mm <sup>2</sup>

**SZY-120 整体式液压钳（铝合金）**  
Hydraulic crimping tools(Aluminum alloy)**技术参数 TECHNICAL DATA:**

出力(Crimping force):	8T
压接范围(Crimping force):	10-120mm <sup>2</sup>
压接形式(Crimping type):	六角圈压
行程(Stroke):	16mm
长度(Length):	410mm
重量(Weight):	1.8Kg
包装(Package):	塑料箱

**配件 ACCESSORIES:**模具(Crimping dies): 10, 16, 25, 35, 50, 70, 95, 120mm<sup>2</sup>**SZY-240 整体式液压钳（铝合金）**  
Hydraulic crimping tools(Aluminum alloy)**技术参数 TECHNICAL DATA:**

出力(Crimping force):	12T
压接范围(Crimping force):	16-240mm <sup>2</sup>
压接形式(Crimping type):	六角圈压
行程(Stroke):	22mm
长度(Length):	460mm
重量(Weight):	2.05Kg
包装(Package):	塑料箱

**配件 ACCESSORIES:**模具(Crimping dies): 16, 25, 35, 50, 70, 95, 120, 150, 185, 240mm<sup>2</sup>**SZY-300 整体式液压钳（铝合金）**  
Hydraulic crimping tools(Aluminum alloy)**技术参数 TECHNICAL DATA:**

出力(Crimping force):	12T
压接范围(Crimping force):	10-300mm <sup>2</sup>
压接形式(Crimping type):	六角圈压
行程(Stroke):	22mm
长度(Length):	470mm
重量(Weight):	2.25Kg
包装(Package):	塑料箱

**配件 ACCESSORIES:**模具(Crimping dies): 10, 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300mm<sup>2</sup>**SZY-300 整体式液压钳（铝合金）**  
Hydraulic crimping tools(Aluminum alloy)**技术参数 TECHNICAL DATA:**

出力(Crimping force):	12T
压接范围(Crimping force):	10-300mm <sup>2</sup>
压接形式(Crimping type):	六角圈压
行程(Stroke):	22mm
长度(Length):	470mm
重量(Weight):	2.75Kg
包装(Package):	塑料箱

**配件 ACCESSORIES:**模具(Crimping dies): 10, 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300mm<sup>2</sup>



**YQK-70** 整体式液压钳  
Hydraulic crimping tools

## 技术参数 TECHNICAL DATA:

出力(Crimping force):	6T
压接范围(Crimping force):	Cu 4~70mm <sup>2</sup>
压接形式(Crimping type):	六角圈压
行程(Stroke):	10mm
长度(Length):	310mm
重量(Weight):	2.8Kg
包装(Package):	塑料箱
配件 ACCESSORIES:	模具(Crimping dies): 4,6,10,16,25,35,50,70mm <sup>2</sup>



**YQK-120** 整体式液压钳  
Hydraulic crimping tools

## 技术参数 TECHNICAL DATA:


出力(Crimping force):	8T
压接范围(Crimping force):	Cu 10~120mm <sup>2</sup>
压接形式(Crimping type):	六角圈压
行程(Stroke):	14mm
长度(Length):	425mm
重量(Weight):	4.0Kg
包装(Package):	塑料箱
配件 ACCESSORIES:	模具(Crimping dies): 10,16,25,35,50,70,95,120mm <sup>2</sup>



**YQK-240** 整体式液压钳  
Hydraulic crimping tools

## 技术参数 TECHNICAL DATA:

出力(Crimping force):	12T
压接范围(Crimping force):	Cu 16~240mm <sup>2</sup>
压接形式(Crimping type):	六角圈压
行程(Stroke):	22mm
长度(Length):	500mm
重量(Weight):	6.3Kg
包装(Package):	塑料箱
配件 ACCESSORIES:	模具(Crimping dies): 16,25,35,50,70,95,120,150,185,240mm <sup>2</sup>

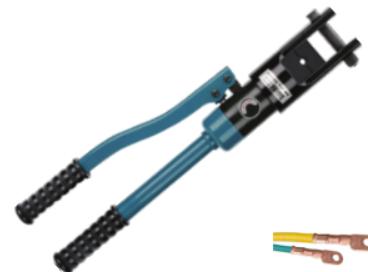

**YQK-300** 整体式液压钳  
Hydraulic crimping tools

## 技术参数 TECHNICAL DATA:

出力(Crimping force):	13T
压接范围(Crimping force):	Cu 16~300mm <sup>2</sup>
压接形式(Crimping type):	六角圈压
行程(Stroke):	22mm
长度(Length):	500mm
重量(Weight):	6.5Kg
包装(Package):	塑料箱
配件 ACCESSORIES:	模具(Crimping dies): 16,25,35,50,70,95,120,150,185,240,300mm <sup>2</sup>

## 产品特点:

- 二段高速、低压，进油迅速，操作容易回油方便
- 采用旋转式挤压方式迅速回油
- 当压力到达700kg/cm<sup>2</sup>(12T)时所设计安全保护装置
- 压接头部可以180度旋转
- 玻璃纤维操作绝缘棒，可耐电压20kV，持续5分钟

## FEATURES:

- High speed, low pressure, fast oil inlet, easy operation and oil return
- Quick oil return by rotary extrusion
- Safety protection device designed when the pressure reaches 700kg/cm<sup>2</sup>(12T)
- Crimp head can rotate 180°
- Fiberglass operated insulating rod, withstand voltage 20kV, lasting for 5 minutes



**EP-430** 整体式液压钳  
Hydraulic crimping tools

## 技术参数 TECHNICAL DATA:

出力(Crimping force):	12T
压接范围(Crimping force):	Cu 50~400mm <sup>2</sup>
压接形式(Crimping type):	六角圈压
行程(Stroke):	32mm
尺寸(Size):	620 × 165 × 102mm
储油量(Oil storage capacity):	145CC
重量(Weight):	6.5Kg
包装(Package):	塑料箱
配件 ACCESSORIES:	模具(Crimping dies): 50,70,95,120,150,185,240,300,400mm <sup>2</sup>

内置安全阀  
With safety valve built-in



**EP-510** 整体式液压钳  
Hydraulic crimping tools

## 技术参数 TECHNICAL DATA:

出力(Crimping force):	13T
压接范围(Crimping force):	Cu 50~400mm <sup>2</sup>
压接形式(Crimping type):	六角圈压
行程(Stroke):	38mm
尺寸(Size):	635 × 170 × 105mm
储油量(Oil storage capacity):	200CC
重量(Weight):	6.8Kg
包装(Package):	塑料箱
配件 ACCESSORIES:	模具(Crimping dies): 50,70,95,120,150,185,240,300,400mm <sup>2</sup>

内置安全阀  
With safety valve built-in



**内置安全阀**  
With safety valve built-in

**HT-300** 整体式液压钳 (铝合金)  
Hydraulic crimping tools(Aluminum alloy)

**技术参数 TECHNICAL DATA:**

出力(Crimping force):	10T
压接范围(Crimping force):	Cu 16~240mm <sup>2</sup>
压接形式(Crimping type):	六角圈压
行程(Stroke):	22mm
长度(Length):	540mm
重量(Weight):	4.5Kg
包装(Package):	塑料箱

**配件 ACCESSORIES:**

模具(Crimping dies): 16, 25, 35, 50, 70, 95, 120, 150, 185, 240mm<sup>2</sup>



**内置安全阀**  
With safety valve built-in

**HT-400** 整体式液压钳 (铝合金)  
Hydraulic crimping tools(Aluminum alloy)

**技术参数 TECHNICAL DATA:**

出力(Crimping force):	13T
压接范围(Crimping force):	Cu 50~400mm <sup>2</sup>
压接形式(Crimping type):	六角圈压
行程(Stroke):	42mm
长度(Length):	556mm
重量(Weight):	7.0Kg
包装(Package):	铝合金密闭箱

**配件 ACCESSORIES:**

模具(Crimping dies): 50, 70, 95, 120, 150, 185, 240, 300, 400mm<sup>2</sup>



**YQK-400C** 整体式液压钳  
Hydraulic crimping tools

**技术参数 TECHNICAL DATA:**

出力(Crimping force):	20T
压接范围(Crimping force):	16~400mm <sup>2</sup>
压接形式(Crimping type):	六角圈压
行程(Stroke):	22mm
长度(Length):	—
重量(Weight):	5.7Kg
包装(Package):	塑料箱

**配件 ACCESSORIES:**

模具(Crimping dies): 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300, 400mm<sup>2</sup>



**内置安全阀**  
With safety valve built-in

**HT-51** 整体式液压钳  
Hydraulic crimping tools

**技术参数 TECHNICAL DATA:**

出力(Crimping force):	60KN
压接范围(Crimping force):	10~240mm <sup>2</sup>
压接形式(Crimping type):	六角圈压
行程(Stroke):	15mm
长度(Length):	380mm
重量(Weight):	3Kg
包装(Package):	铁箱

**配件 ACCESSORIES:**

模具(Crimping dies): 10, 16, 25, 35, 50, 70, 95, 120, 150, 185, 240mm<sup>2</sup>

**产品特点:**

- 适用于输配电室内户外工程、各种接续金具、架空地电缆线专业使用
- 高压电缆套管、线夹、裸端子、六角型压著，紧密不易脱落，导电良好
- 模具规格不合适，欢迎订制
- 油管接头配PT3/8"牙



**EP-430H** 分体式液压钳  
Hydraulic crimping tools

**技术参数 TECHNICAL DATA:**

出力(Crimping force):	12T
压接范围(Crimping force):	Cu 50~400mm <sup>2</sup>
压接形式(Crimping type):	六角圈压
行程(Stroke):	32mm
重量(Weight):	4.0Kg
尺寸(Size):	340 x 110 x 65mm

**配件 ACCESSORIES:**

模具(Crimping dies): 50, 70, 95, 120, 150, 185, 240, 300, 400mm<sup>2</sup>

**FEATURES:**

- It is suitable for indoor and outdoor works of power transmission and distribution room, professional use of various connecting hardware and overhead underground cable
- High voltage cable sleeve, clamp, bare terminal, hexagonal pressing, tight and not easy to fall off, good conductivity
- If the mold specification is not right, you are welcome to order
- Oil pipe joint with PT3/8" thread



**EP-510H** 分体式液压钳  
Hydraulic crimping tools

**技术参数 TECHNICAL DATA:**

出力(Crimping force):	13T
压接范围(Crimping force):	50~400mm <sup>2</sup>
压接形式(Crimping type):	六角圈压
行程(Stroke):	38mm
重量(Weight):	5.0Kg
尺寸(Size):	380 x 120 x 75mm

**配件 ACCESSORIES:**

模具(Crimping dies): 50, 70, 95, 120, 150, 185, 240, 300, 400mm<sup>2</sup>

**产品特点:**

- 适用于输配电室内户外工程、各种接续金具、架空地电缆线专业使用
- 高压电缆套管、线夹、裸端子、六角型压著，紧密不易脱落，导电良好
- 模具规格不合适，欢迎订制
- 油管接头配PT3/8"牙

**ZCO-300B** 分体式液压钳  
Hydraulic crimping tools

**技术参数 TECHNICAL DATA:**

出力(Crimping force):	12T
压接范围(Crimping force):	16~300mm <sup>2</sup>
压接形式(Crimping type):	六角圈压
行程(Stroke):	22mm
重量(Weight):	3.5Kg
尺寸(Size):	355 x 165 x 50mm

**配件 ACCESSORIES:**

模具(Crimping dies): 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300mm<sup>2</sup>



**FEATURES:**

- It is suitable for indoor and outdoor works of power transmission and distribution room, professional use of various connecting hardware and overhead underground cable
- High voltage cable sleeve, clamp, bare terminal, hexagonal pressing, tight and not easy to fall off, good conductivity
- If the mold specification is not right, you are welcome to order
- Oil pipe joint with PT3/8" thread

[WWW.CHINAHYDRAULICTOOL.COM](http://WWW.CHINAHYDRAULICTOOL.COM)

WHATSAPP:+86-15659803673

SALES@CHINAHYDRAULICTOOL.COM

---