


产品特点:

- 轻巧紧凑设计用于狭小工作空间
- 烤漆表面增强耐腐蚀能力
- 防尘圈减少污染延长油缸使用寿命
- 轻便容易携带，油缸平面设有二孔以供固定使用

FEATURES:

- Light and compact design, working in small space
- Paint surface enhances corrosion resistance
- Dust ring reduces pollution and prolongs service life of oil cylinder
- It is light and easy to carry, and the plane of the oil cylinder is provided with two holes for fixed use

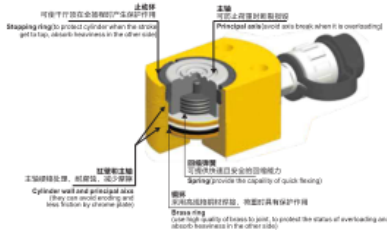

超薄型液压千斤顶 Thin type hydraulic cylinder

技术参数 TECHNICAL DATA :

型号 (Model)	吨位 (Tonnage)	行程 (Stroke)	有效面积 (Effective area)	油缸内径 (Inner diameter of cylinder)	油缸外径 (Outside diameter of cylinder)	本体高度 (Height)	重量 (Weight)	配置泵浦 (Matching pump)
JH-FPY-5	5T	8mm	9.61cm ²	35mm	60×45mm	40mm	0.7kg	CP-180
JH-FPY-10	10T	11mm	15.89cm ²	45mm	80×60mm	47mm	1.6kg	CP-180
JH-FPY-20	20T	12mm	33.16cm ²	65mm	100×80mm	55mm	2.75kg	CP-180
JH-FPY-30	30T	14mm	50.24cm ²	80mm	125×100mm	61mm	5.0kg	CP-700
JH-FPY-50	50T	17mm	78.5cm ²	100mm	155×130mm	71mm	8.5kg	CP-700
JH-FPY-100	100T	18mm	143.06cm ²	135mm	200×170mm	90mm	19kg	CP-700
JH-FPY-200	200T	22mm	201cm ²	192mm	275×245mm	102mm	42.7kg	CP-700-2



多节型液压千斤顶 Multistage hydraulic cylinder

技术参数 TECHNICAL DATA :

型号 (Model)	吨位 (Tonnage)	行程 (Stroke)				储油量 (Oil capacity)	本体高度 (Height)	重量 (Weight)
		1	2	3	总			
JH-DFPY-10	10T	13mm	13mm	-	26mm	22cc	51mm	1.6kg
JH-DFPY-20	20T	16mm	14mm	-	30mm	41cc	57mm	2.8kg
JH-DFPY-30	30T	14mm	21mm	19mm	54mm	58cc	63mm	5.5kg
JH-DFPY-50	50T	20mm	23mm	22mm	65mm	113cc	71mm	9kg
JH-DFPY-100	100T	20mm	24mm	25mm	69mm	225cc	87mm	20.5kg



短型液压千斤顶 Short hydraulic jack

技术参数 TECHNICAL DATA :

型号 (Model)	吨位 (Tonnage)	行程 (Stroke)	本体高度 (Height)	外径 (Outer diameter)	内径 (the inside diameter of)	重量 (Weight)	有效面积 (Effective area)	配置泵浦 (Matching pump)
JH-RSC-1050	10T	50mm	100mm	60mm	45mm	2.7kg	15.89cm ²	CP-180
JH-RSC-2050	20T	50mm	105mm	85mm	65mm	5.0kg	33.16cm ²	CP-180
JH-RSC-3050	30T	50mm	108mm	105mm	80mm	7.0kg	50.24cm ²	CP-700
JH-RSC-5050	50T	50mm	110mm	120mm	100mm	9.9kg	78.5cm ²	CP-700
JH-RSC-10050	100T	50mm	120mm	170mm	135mm	23.0kg	143.06cm ²	CP-700
JH-RSC-20050	200T	50mm	151mm	248mm	196.3mm	52.0kg	302.5cm ²	CP-700-2



长型液压千斤顶 Long hydraulic jack

技术参数 TECHNICAL DATA :


型号 (Model)	吨位 (Tonnage)	行程 (Stroke)	本体高度 (Height)	外径 (Outer diameter)	内径 (the inside diameter of)	重量 (Weight)	有效面积 (Effective area)	配置泵浦 (Matching pump)
JH-RSC-10100	10T	100mm	150mm	60mm	45mm	3.5kg	15.89cm ²	CP-180
JH-RSC-20100	20T	100mm	155mm	85mm	65mm	9.0kg	33.16cm ²	CP-700
JH-RSC-30100	30T	100mm	160mm	105mm	80mm	12.5kg	50.24cm ²	CP-700
JH-RSC-50100	50T	100mm	165mm	120mm	100mm	12.6kg	78.5cm ²	CP-700-2
JH-RSC-100100	100T	100mm	170mm	170mm	135mm	29.5kg	143.06cm ²	CP-700-2



加长型液压千斤顶 Extended hydraulic jack

技术参数 TECHNICAL DATA :

型号 (Model)	吨位 (Tonnage)	行程 (Stroke)	本体高度 (Height)	外径 (Outer diameter)	内径 (the inside diameter of)	重量 (Weight)	有效面积 (Effective area)	配置泵浦 (Matching pump)
RSC-10150	10T	150mm	200mm	60mm	45mm	4.3kg	15.89cm ²	CP-700
RSC-20150	20T	150mm	205mm	85mm	65mm	13.0kg	33.16cm ²	CP-700
RSC-30150	30T	150mm	210mm	105mm	80mm	17.5kg	50.24cm ²	CP-700
RSC-50150	50T	150mm	215mm	120mm	100mm	16.1kg	78.5cm ²	CP-700-2
RSC-100150	100T	150mm	220mm	170mm	135mm	36.5kg	143.06cm ²	CP-700-2



中空液压千斤顶 Hollow hydraulic cylinder

技术参数 TECHNICAL DATA :

型号 (Model)	吨位 (Tonnage)	行程 (Stroke)	本体高度 (Height)	孔径 (Aperture)	突出高度 (Salient height)	外径 (Outer diameter)	内径 (the inside diameter of)	主轴外径 (Spindle diameter)	重量 (Weight)	配置泵浦 (Matching pump)
RCH-2050	20T	50mm	175mm	28mm	12mm	98mm	78mm	53mm	8kg	CP-700
RCH-20100	20T	100mm	255mm	28mm	12mm	98mm	78mm	53mm	11kg	CP-700
RCH-3050	30T	50mm	185mm	34mm	12mm	120mm	92mm	65mm	12.3kg	CP-700
RCH-30100	30T	100mm	260mm	34mm	12mm	120mm	92mm	65mm	15.6kg	CP-700
RCH-6050	60T	50mm	231mm	55mm	12mm	170mm	135mm	94mm	29.4kg	CP-700-2
RCH-60100	60T	100mm	300mm	55mm	12mm	170mm	135mm	94mm	37.3kg	CP-700-2
RCH-10075	100T	75mm	285mm	80mm	12mm	220mm	176mm	129mm	60.3kg	CP-700-2